ZSM / ZSH

2.5 | 4

Beading Machine for Workshop and Construction Site

This mechanical beading machine features a robust **steel-welded** construction frame, ensuring durability and structural integrity. Operational control is done by a convenient **foot pedal**. This product comes complete with **four sets** of **standard rolls**, making it a versatile and essential tool for all your fabrication needs.

Motorized roller drive with **mechanically driven upper roll** feeding on ZSM models and **hydraulically driven upper roll** feeding on ZSH models.



2.5 Standard Dies

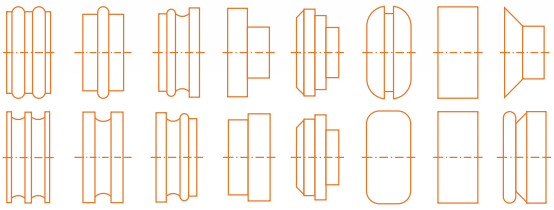

2.5 Optional Dies

STANDARD CONFIGURATION

- Standard Rollers
- Baseframe
- Reducer
- Foot Pedal

ZSM / ZSH		2.5	4.0
		13 Ga	9 Ga
Max. Material Thickness	mm	2.5 (0.1”)	4.0 (0.15”)
Rolls Opening	mm	96 (3.75”)	126 (5”)
Throat	mm	160 (6.3”)	200 (7.8”)
Beading Speed	rpm	16	12
Main Drive Motor	kW	1.5 (2 Hp)	2.2 (3 Hp)
Hydraulic Motor	kW	–/0.75 (–/1 Hp)	–/0.75 (–/1 Hp)
Dimensions (L/W/H)	mm	1400x550x1120 (56x22x44”)	1700x570x1200 (67x23x48”)
Weight	kg	380 (830 lbs)	500 (1,100 lbs)
Item No. (ZSM)		9901011	9901012
Item No. (ZSH)		9902001	9902002



4.0 Standard Dies

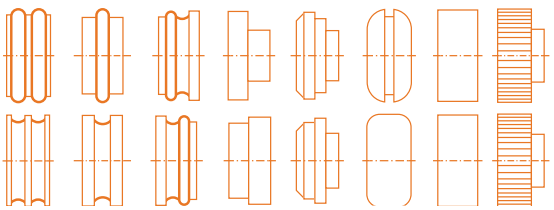

4.0 Optional Dies

*The above specifications are subject to change without prior notice. No liability for printing mistakes. Machine may be shown with optional equipment.